

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

109040" 62200650

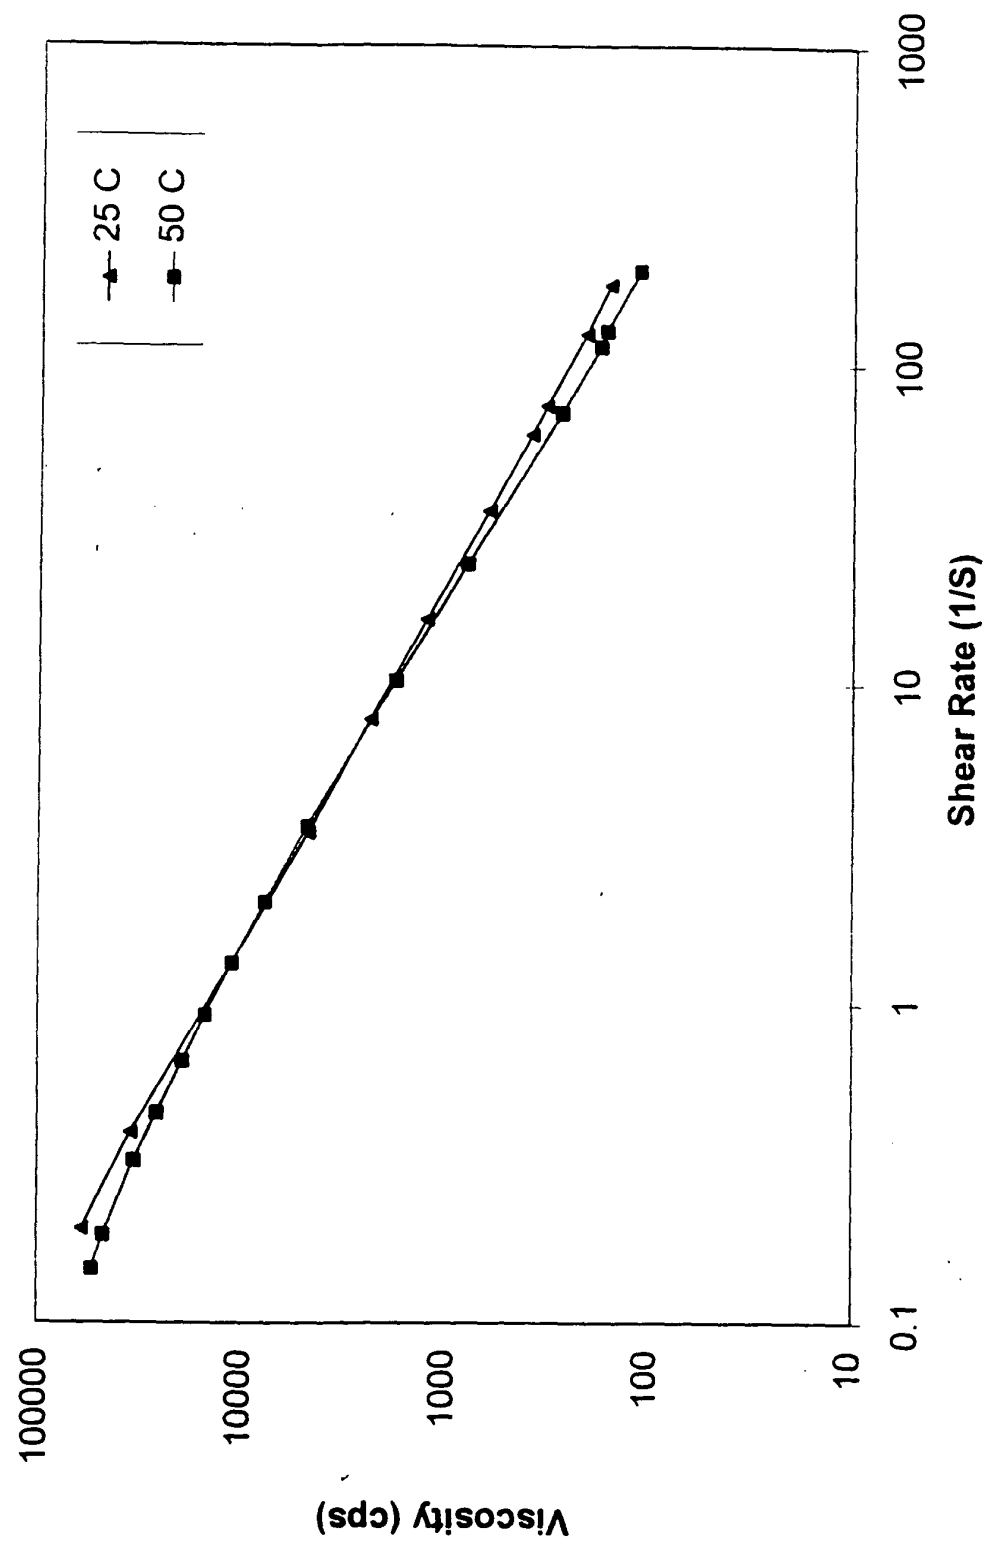


Figure 1. 5% disodium tallowiminodipropionate with 2.25% phthalic acid at 25 and 50 degree C

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

T09040" 622DD650

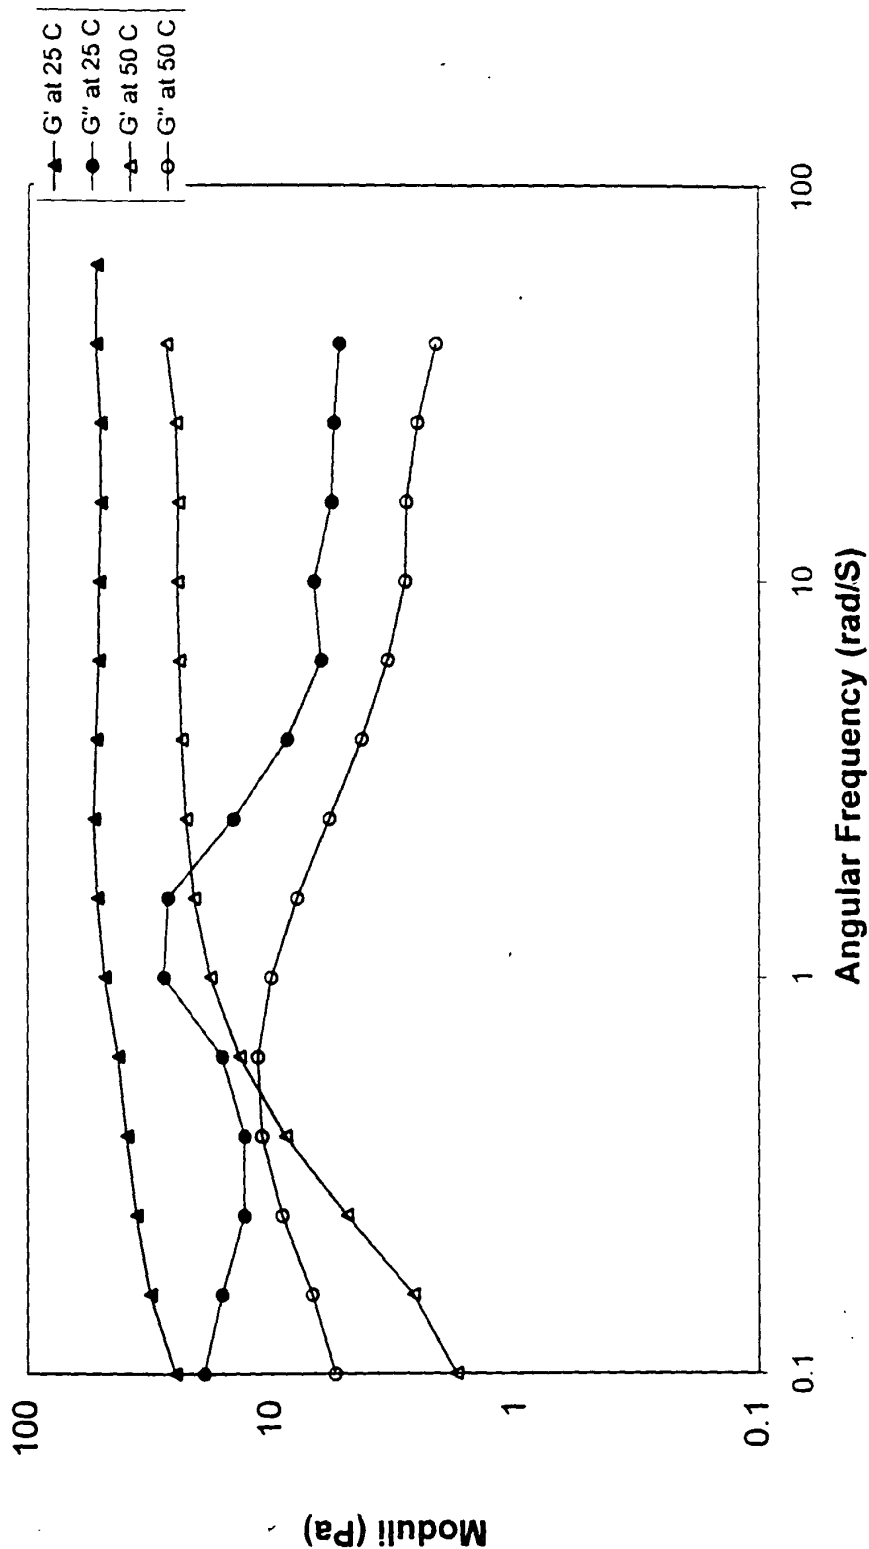
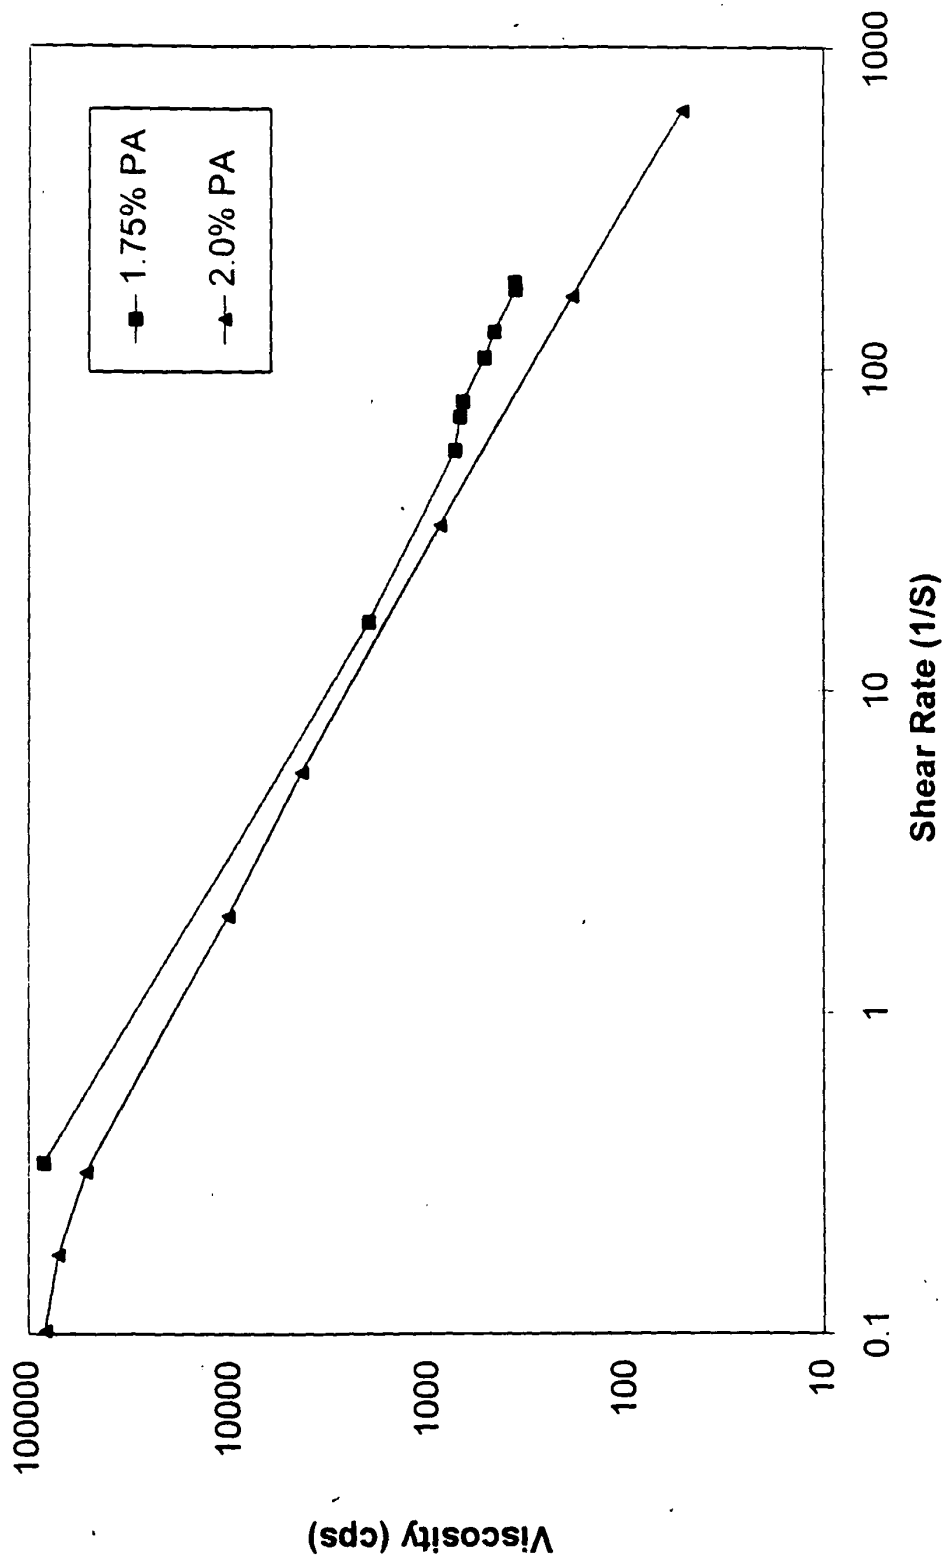


Figure 2: Dyanmic shear moduli measurements for samples with 5% disodium tallowiminodipropionate and 2.25% phthalic acid at 25 and 50 degree C

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

T09040" 62200660



**Figure 3:** 5% disodium tallowiminodipropionate, 4% NH<sub>4</sub>Cl with different amount of phthalic acid (PA) at 25 C

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

109020" 62200660

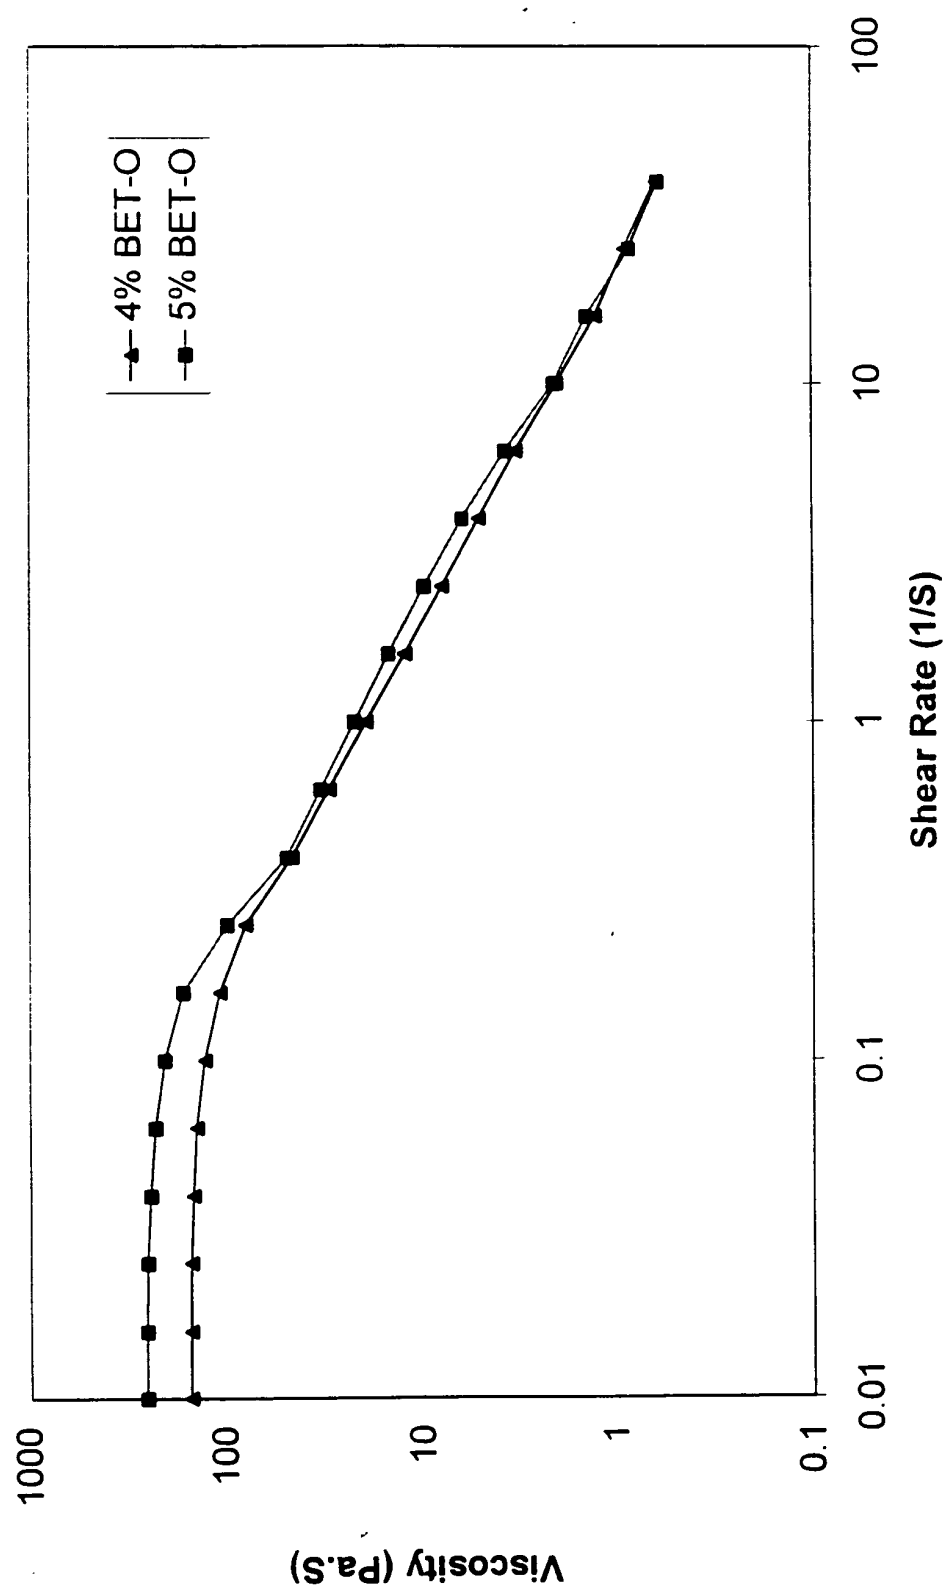


Figure 4. Steady shear viscosity of different amount of oleamidopropyl betaine (BET-O) in presence of 3% KCl and 0.5% Phthalic Acid at 25 C

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

T09020" 62200660

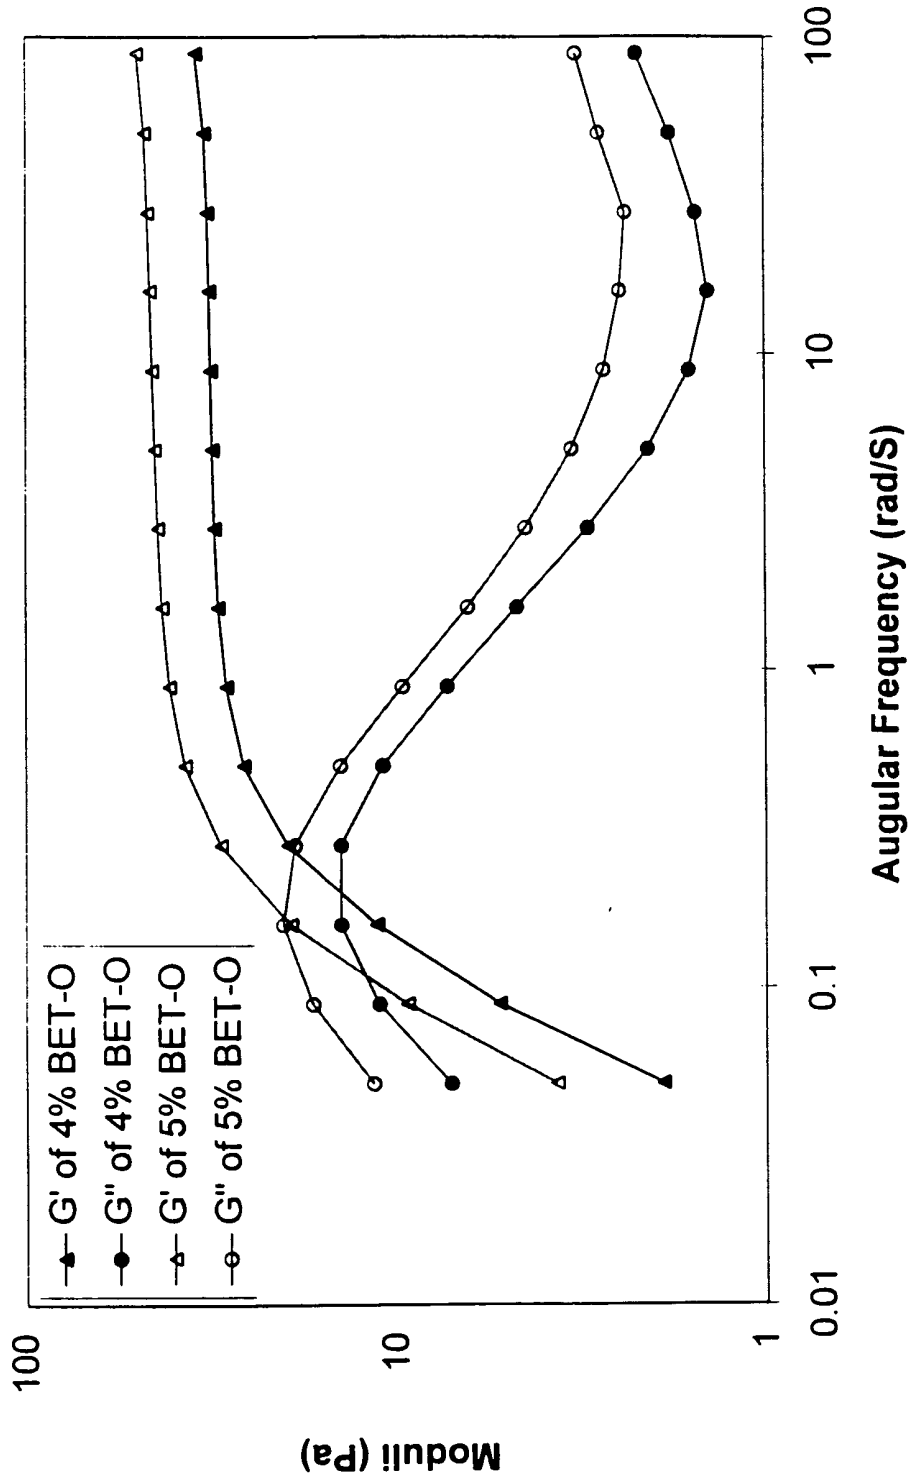


Figure 5. Dyanmic shear moduli of different amount of oleamidopropyl betaine (BET-O) in presence of 3% KCl and 0.5% phthalic acid at 25 C.